


Countertop Baby Changing Station Surface Mount

KB112-01CT

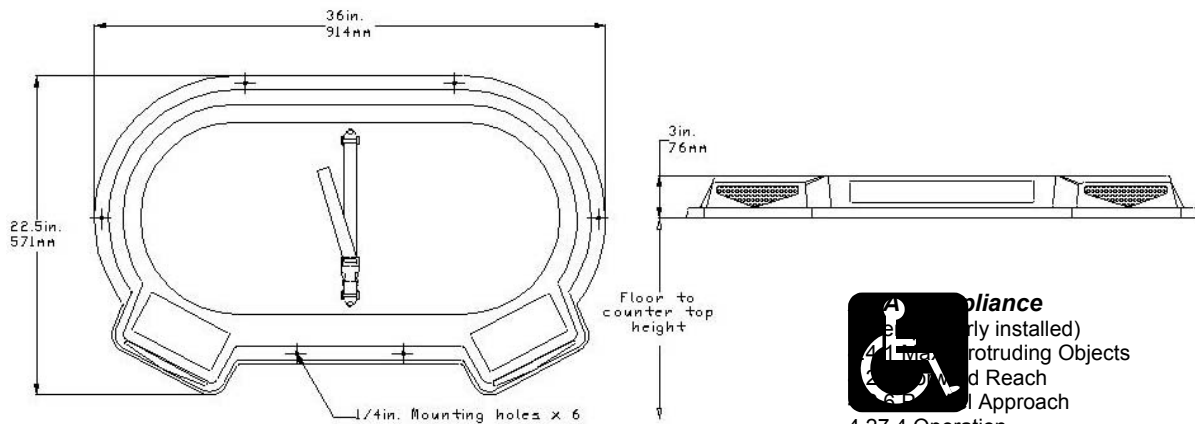

Compliance
Protruding Objects
Clearance
Approach

4.27.4 Operation

MATERIALS:

FDA approved thermoformed high-density polyethylene. Mounting instructions and hardware included. Graphics and safety messages in six languages. Contoured changing surface comes complete with nylon safety straps.

OPERATION:

For use in restrooms where counter space is more abundant than wall space. High-density polyethylene has no sharp corners, is easy to clean and resists odors and bacterial growth. Two molded-in liner dispensers hold approximately 25 KB150-99 sanitary liners each.

Warning: *To insure that the unit supports the intended loads, baby changing stations must be properly installed according to the manufacturer's instructions.*

INSTALLATION:

To insure proper installation and compliance with building codes, it is recommended that a qualified person or carpenter perform the installation of the unit.

Drilling holes and mounting the station:

1. Remove the station from the shipping container and check for any freight damage. Identify the best location for installing the baby changing station.
2. Place the changing station onto the counter top in the desired position. Using the unit's center mounting holes as a guide, mark the screw hole locations onto the counter top and drill $\frac{1}{4}$ " diameter by 1-1/2" deep holes into the counter top.
3. Apply a suitable water sealant, such as silicone, around the bottom edge of the changing station, then set unit onto the countertop using the mounting holes as a guide. Fasten unit to counter top with supplied screws.

Caution:

Drill carefully through ceramic tile and other hard counter top materials.

SPECIFICATION:

Baby changing station shall be durable, high impact polyethylene body. Design of unit shall be countertop mounted. Bed shall have smooth concave changing area with a nylon safety strap and universal instruction graphics. Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project. The unit shall be backed by a 5-year manufacturers limited warranty and manufactured in the U.S.A.